Rosenberger

Reliable Connectivity Solutions for Off-Road Applications

Agriculture & Construction

ALL-TERRAIN





Rosenberger provides rugged, integrated connectivity solutions for all-terrain, agricultural, construction and off-road applications – from connectors to complete cable assemblies.



Contents

All-Terrain 4
- Your Connection to All-Terrain Applications 4
- Applications and Use Cases 4
- Integrated Connectivity 5
- Benefits 5
- Enabling electrified off-road vehicles 6
- Applications in Agriculture 8
- Applications in Construction 14

All-Terrain Product Portfolio 20

High-Speed Hybrid HSI Connectors 22

High-Speed Data Connectors 26
- Radar and LiDAR Solutions 26
- Camera Solutions 27
- HFM® 28
- FAKRA 28
- H-MTD® 29
- RosenbergerHSD® 29
- EDC® Expanded Daisy Chain 30
- Scalable Multiheader 31
- RoProxCon® SoM 32

Magnetic Connectors 33
- MagCode® 34
- RoPD® 35

High-Voltage Power Connectors 36
- HVR®25 37
- HVR®55 37
- HVR®60 38
- HPK 38
- HVR®210 39
- HVR®280 39
- HVS®240 40
- HVS®420 40
- HVU®50 41
- HVU®400 41

About Rosenberger 42

Learn more about All-Terrain Integrated Connectivity

www.rosenberger.com/all-terrain

Your Connection to All-Terrain Applications

Off-road vehicles operate in some of the most demanding environments — exposed to dirt, moisture, vibration, and extreme temperatures. At the same time, increasing electrification and digitalization require reliable transmission of both power and high-speed data.

Rosenberger supports OEMs and system suppliers with robust, application-optimized connectivity solutions that ensure long-term performance and simplify integration.

Advantages of Electric Vehicles

- Zero local CO_2 and NO_X emissions
- Up to 50% lower noise levels
- Significantly reduced maintenance
- No engine oil changes or exhaust aftertreatment systems
- High energy efficiency
- Ideal for emission-sensitive sites

Your Applications and Use Cases

- Tractor telematics
- Cabin infotainment
- Chassis and trailer coupling
- Engine and internal wiring
- Sensor connectivity in agricultural machinery
- Data transmission for smart farming systems
- Power and signal distribution in construction equipment
- High-speed data links in electrified off-road vehicles

Our Solution: Integrated Connectivity

Rosenberger goes beyond individual components, we deliver complete interconnect solutions. These modular solutions are built from a connectivity stack designed to meet any individual requirement—reliable systems tailored even for the harshest environments.

Rugged Connectors

- Sealed designs for harsh environments (IP67, IP69K)
- High resistance to vibration, temperature and mechanical stress
- Reliable signal and power transmission

Hybrid Cable Assemblies

- Pre-assembled and tested solutions
- Reduced installation effort
- Plug and play: Optimized for system integration

System Integration

- Customized interconnect solutions
- Lower number of interfaces and points of failure
- Faster time-to-market

Your Benefits of Rosenberger Solutions

- Complete connectivity solutions that meet your needs
- Reduced system complexity
- Faster integration into vehicle platforms
- High reliability in extreme conditions
- Flexible customization for specific applications
- End-to-end expertise from connectors to cable assemblies

Why data connectors, power connectors, and cable assemblies are essential for electrified off-road vehicles in agriculture and construction

Data connectors, power connectors, and cable assemblies have become critical enabling technologies for electrified off-road vehicles in agriculture and construction. Rather than serving as simple interconnects, they play a key role in ensuring the performance, safety, reliability, and efficiency of the entire electrical and electronic system.

Safe Transmission of High Power

Electric off-road vehicles operate with high-voltage systems – typically 400 V to 800 V or even higher – and high current levels.

High-voltage connectors must:

- Reliably carry high continuous currents
- Minimize contact resistance and power losses
- Prevent overheating
- Withstand severe vibration and mechanical shock

Reliable High-Speed Data Communication

Modern off-road vehicles integrate numerous electronic control units (ECUs), sensors, and intelligent subsystems. These components communicate through networks such as:

- CAN / CAN FD
- Automotive Ethernet (100BASE-T1, 1000BASE-T1)
- LIN
- Other industrial communication protocols

Enabling Digitalization and Autonomous Operation

As electrified machines and vehicles become increasingly connected and intelligent, they depend on robust, high-bandwidth, and highly reliable data connectivity.

While supporting applications such as:

- Fleet management
- GPS positioning
- Remote diagnostics
- Over-the-air (OTA) software updates
- AI-assisted machine functions
- Semi-autonomous and autonomous operation

Withstanding Harsh Operating Environments

Off-road vehicles operate under some of the world's most demanding environmental conditions, including dust, mud, water, salt spray, oil and chemicals, continuous vibration, extreme temperatures ranging from approximately –40 °C to above +100 °C.

Connectors and cable assemblies must therefore provide:

- High ingress protection (e.g., IP67/IP69K)
- Corrosion resistance
- UV resistance
- Outstanding mechanical durability

Supporting Functional Safety

Electrified off-road vehicles must comply with stringent safety requirements. Rosenberger connectors ensure safe operation throughout the vehicle's service life and contribute features such as:

- High Voltage Interlock Loop (HVIL)
- Touch-safe designs
- Secure locking mechanisms
- Electromagnetic compatibility (EMC) optimization
- Effective shielding against electromagnetic interference (EMI)

Future Trends Drive Higher Requirements

The next generation of electrified off-road vehicles will require:

- Larger battery capacities
- Megawatt-class charging systems
- Higher onboard power levels
- Increased sensor density
- Gigabit Ethernet communication
- Modular vehicle architectures

Connectivity Solutions


As a result, the demands placed on connectors and cable assemblies will continue to increase in terms of electrical performance, data transmission, reliability, and system integration.

- Combination of high-voltage power distribution with high-speed data connectivity
- Reduced weight and installation space
- Support of modular vehicle architectures
- Exceptional reliability over the machine's lifetime
- Global safety and industry standards

Smart Connectivity for the Industrial Agriculture of Tomorrow

In today's agriculture, reliable connections between tractors and trailers, seed, fertiliser and harvesting machines are essential. The challenges are not only terrain and weather conditions but also requirements for sustainable systems and potential savings. This requires connections with high power and data performance, as well as intelligent and digital data transmission for programming, measurement, evaluation, monitoring and positioning.

- Tractors and harvesting equipment
- Smart farming systems (ISOBUS / AEF)
- Sensor and control connectivity
- Electrified agricultural machinery

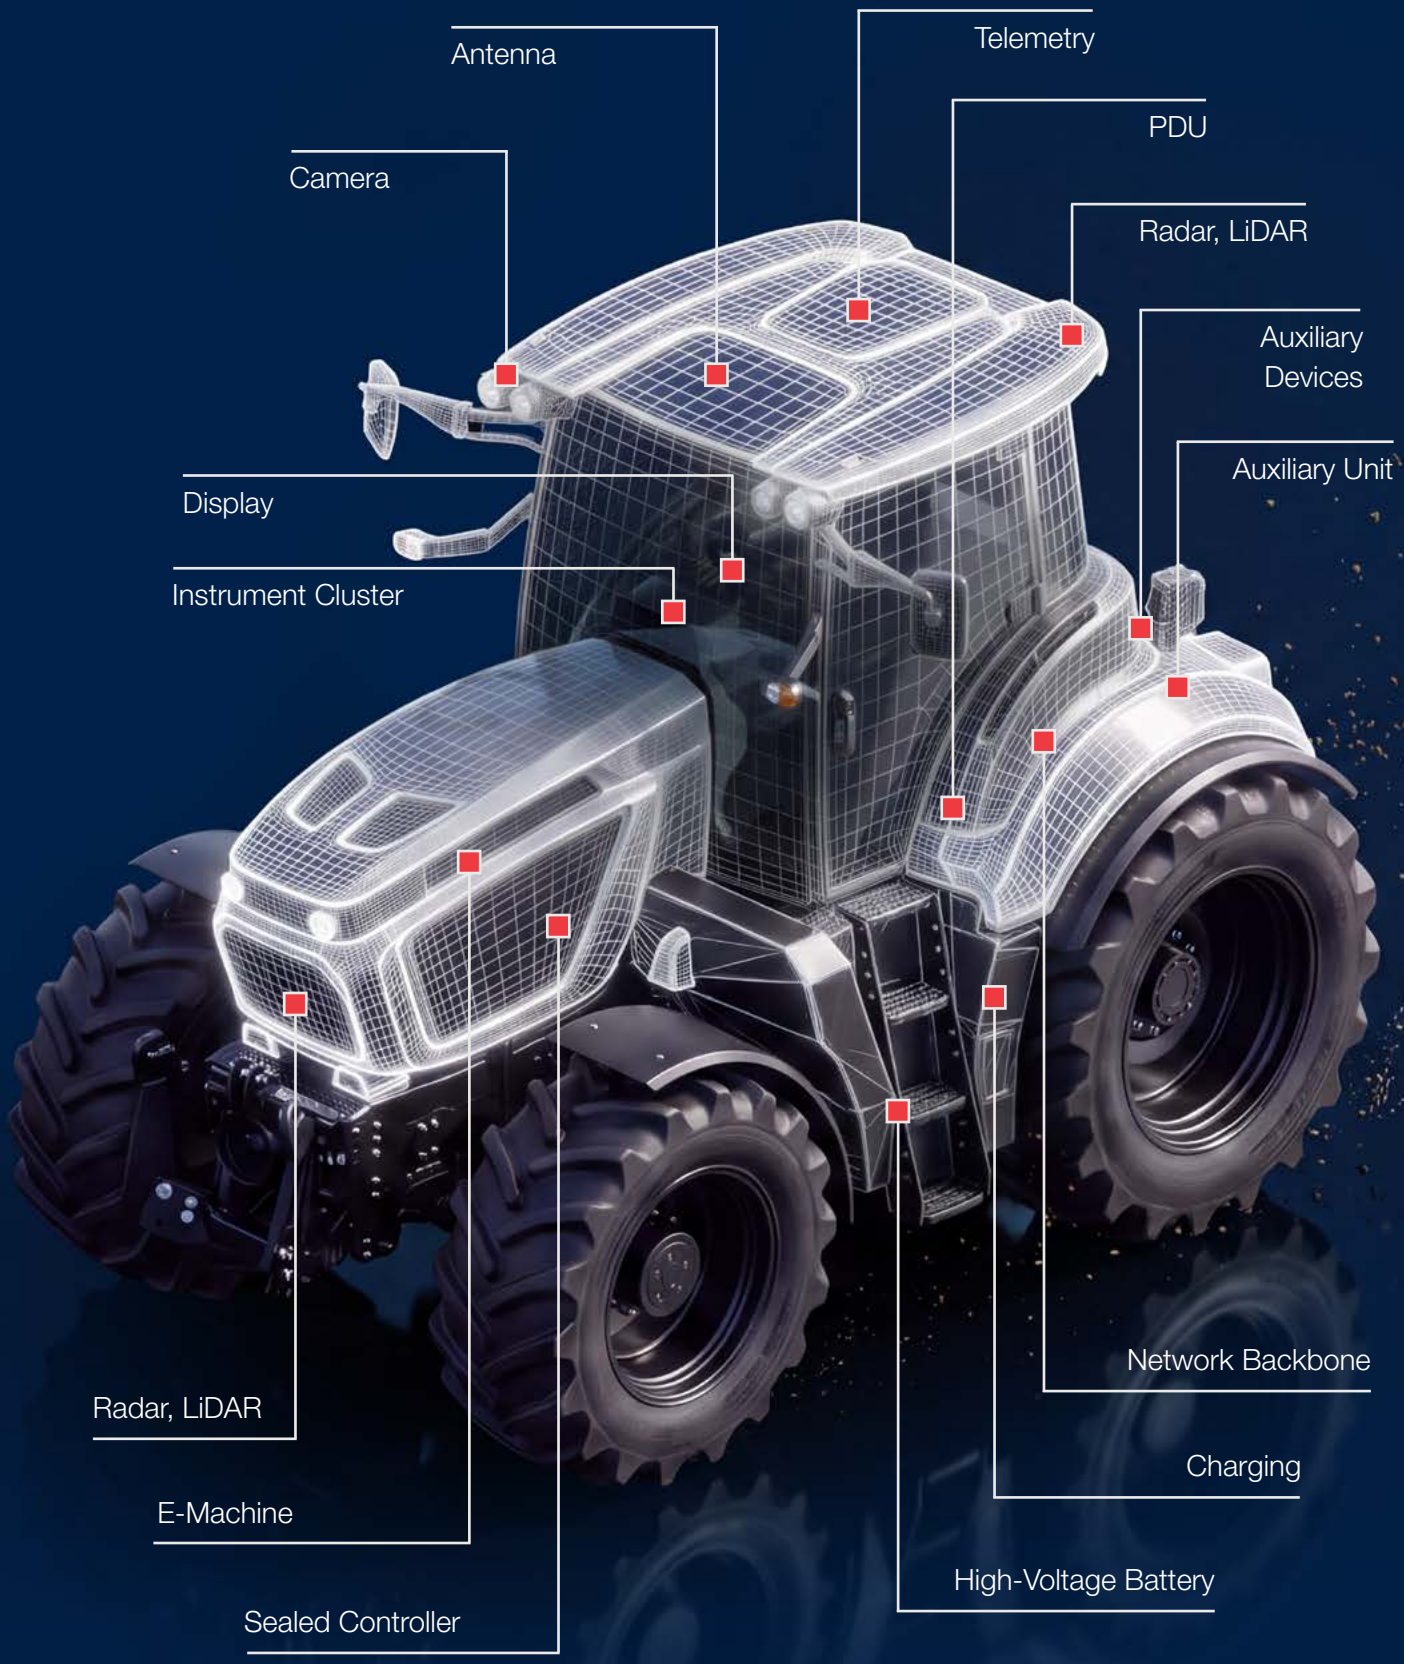
Antenna
Telemetry
PDU
Camera
Radar, LiDAR
Auxiliary Devices
Auxiliary Unit
Display
Instrument Cluster
Network Backbone
Radar, LiDAR
Charging
E-Machine
High-Voltage Battery
Sealed Controller

Data Connectors

Telemetry	2	3	4	5		
Antenna	2	5				
Camera	1	2	3	5		
Network Backbone	4	6	8			
Sealed Controller	2	3	4	5	9	
Radar, LiDAR	1	2	3	4	5	
Display	3	4	6	7	9	
Instrument Cluster	3	4	5	6	7	9



1 
Camera, Radar, LiDAR

2 
HFM®

3 
Rosen-berger HSD®

4 
H-MTD®

5 
FAKRA

6 
HSI

7 
RoProxCon®

8 
EDC®

9 
Multi-header

High-Voltage Connectors



1  HPK

2  HVR®210
HVR®280

3  HVR®25
HVR®55
HVR®60

4  HVS®240
HVS®420

5  HVU®

6  HSI


7  RoPD®

8  MagCode®

Reliable Performance for Future Heavy-Duty Equipment and Vehicles – from Construction Sites to Off-Road Terrain

Typical applications for HV connectors include battery systems, traction motors, inverters, onboard chargers, and DC fast-charging interfaces. High-performance data connectors ensure fast, reliable, and interference-free communication between the battery management system, motor controller, hydraulic systems, operator interfaces, telematics, and advanced driver assistance systems.

- Excavators, cranes, and loaders
- Heavy-duty machinery, trucks and trailers
- Electrified construction machinery

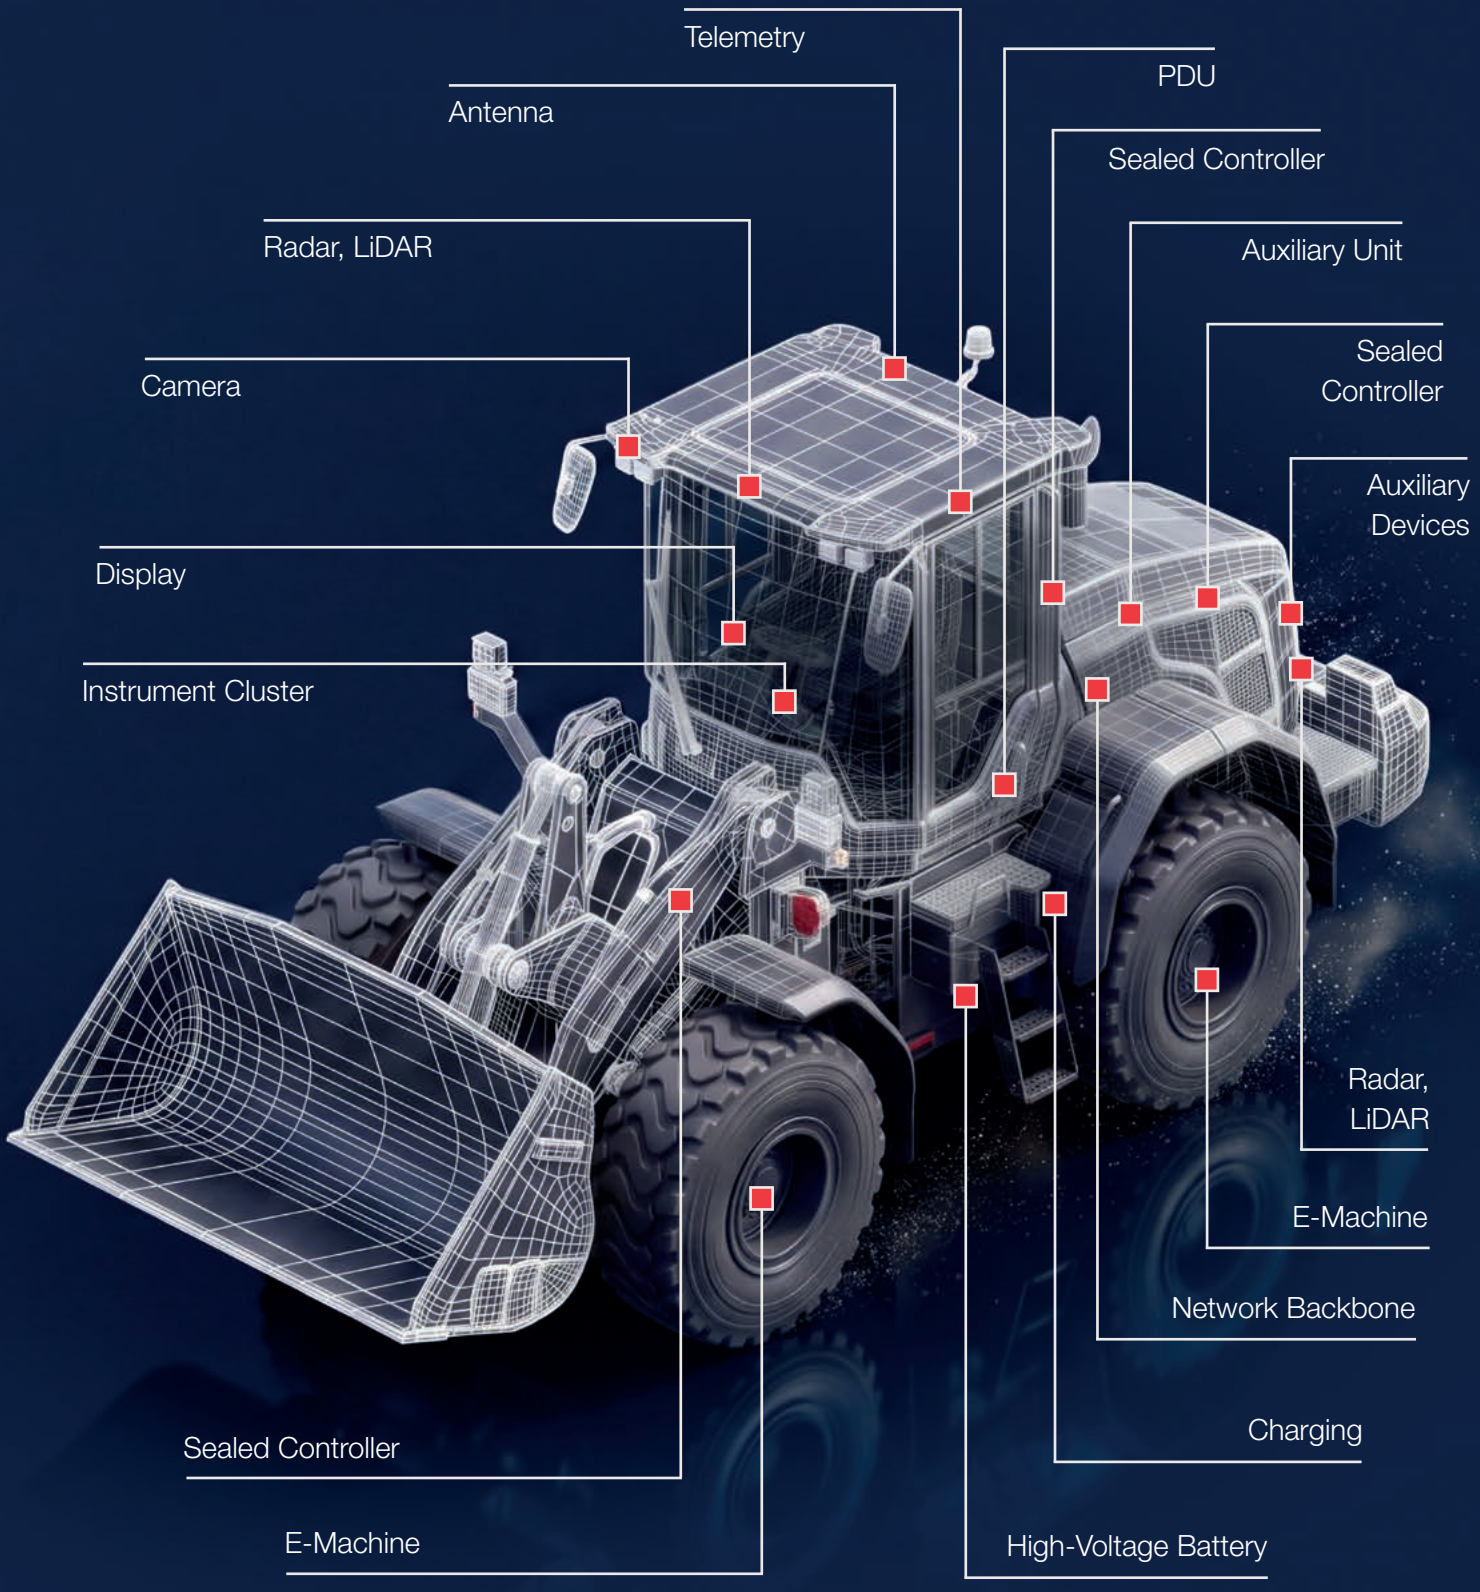
Telemetry
PDU
Antenna
Sealed Controller
Radar, LiDAR
Auxiliary Unit
Camera
Sealed Controller
Auxiliary Devices
Display
Instrument Cluster
Radar, LiDAR
E-Machine
Network Backbone
Charging
Sealed Controller
E-Machine
High-Voltage Battery

Data Connectors



1  Camera, Radar, LiDAR


2  HFM®

3  Rosen-berger HSD®

4  H-MTD®

5  FAKRA

6  HSI

7  RoProxCon®

8  EDC®

9  Multi-header

High-Voltage Connectors



1 HPK



2 HVR®210
HVR®280



3 HVR®25
HVR®55
HVR®60



4 HVS®240
HVS®420



5 HVU®50
HVU®400



6 HSI



7 RoPD®



8 MagCode®



Hybrid HSI Connectors

Highly robust power-data connectors for reliable connectivity for harsh environment applications

- Break-away function
- SI/EMC performance for 1000BASE-T1
- Mating cycles more than 3000
- Waterproof IPX9K
- UV-resistant
- Flame-retardant housing material





Camera, Radar and LiDAR Connectors

Camera, radar and lidar provide complementary data for comprehensive environmental perception and sensor fusion – combining robust distance and velocity measurement, detailed visual information, and precise 3D mapping.


- Radar directly measures distance, relative speed, and direction using millimeter-wave signals
- Cameras provide detailed visual information, with distance and speed derived through image processing
- Lidar uses laser pulses for precise distance measurement and 3D mapping, enabling accurate object detection while requiring high-speed, low-latency data transmission

Data Connectors

High-speed data connectors for high data transmission applications eg. ECU's PCB

- Scalable multiheader
- Coaxial: HFM®, FAKRA
- Differential: H-MTD®, RosenbergerHSD®
- EDC®: Daisy chain connectors
- Waterproof variants



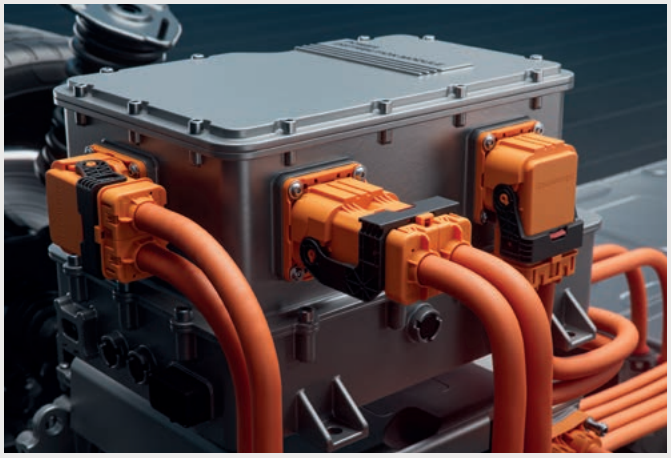

High-Voltage Connectors

Shielded and unshielded High-Voltage connectors developed for optimized power transmission in electric vehicles for agricultural and construction industries

- HVR®25, HVR®55, HVR®60, HVR®210, HVR®280
- HPK, 1-pole, 2-pole
- HVS®240 / HVS®420
- HVU®50
- Magnetic connectors: MagCode®, RoPD®

High-Speed Hybrid HSI Connectors

Designed for harsh conditions and standardized in cooperation with the AEF (Agricultural Industry Electronics Foundation), the HSI connector system sets a new high-performance standard for hybrid power and data transmission solutions in high-speed implement bus systems. Rosenberger HSI connectors enable these and future tasks, such as GPS-controlled agriculture and coordinated data systems for various requirements. The HSI connector system is the standardized solution within the AEF, but is also suitable for other areas of application, including construction machinery and trucks exposed to demanding environmental conditions.

HSI meets H-MTD® Interface

Hybrid solution for power and data transmission using a cable assembly with rugged HSI to waterproof H-MTD® connectors from the tractor unit to the trailer-ECU-PCB.

Learn more about HSI

www.rosenberger.com/hsi





HSI Jack straight

- Rosenberger No. T1K141-1CHB1-y
- Cable assembly LCH-004-xxx-y
- Implement connector
- Waterproof





HSI Housings

Break-Away

Rosenberger No. T1Z141-000/95

In-Cabine

Rosenberger No. T1Z141-000/96 w/o cap

Park Position

Rosenberger No. T1Z141-000/97 with cap


Cap

Rosenberger No. T1Z141-000/52

HSI Plug straight

- Rosenberger No. T1S141-1CMB1-y
- Cable assembly 6 mm^2 LCD-004-xxx-y
- Vehicle connector
- Waterproof



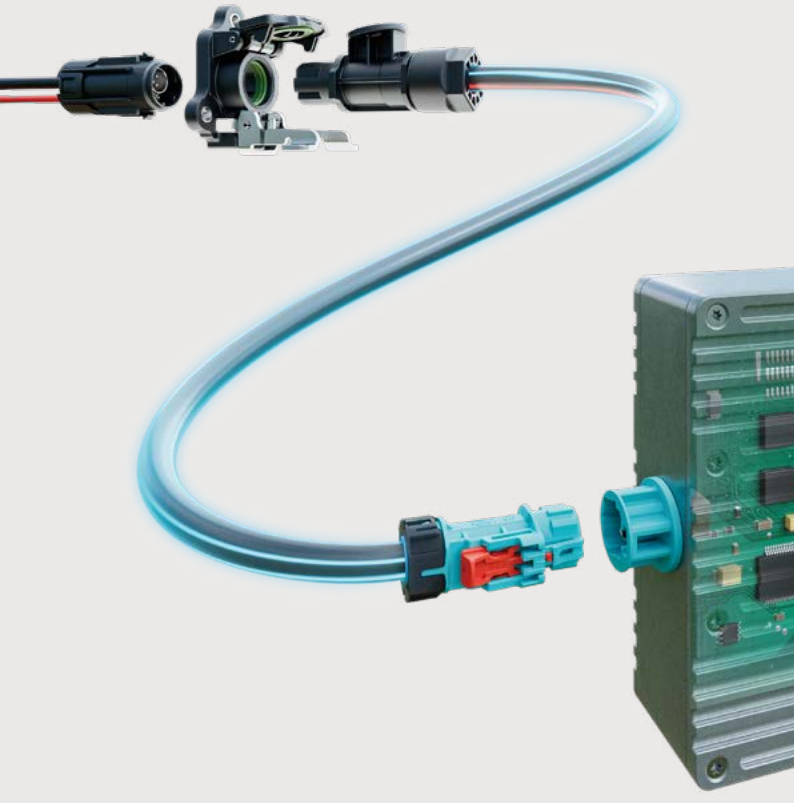

Cable Assemblies HSI to H-MTD®


- HSI jack straight to H-MTD® 0.5 mm
- Waterproof
- Data and power transmission
- Maximum length 40 m
- Custom specific versions on request

Radar and LiDAR Solutions

Radar's greatest strength lies in its ability to directly measure distance, relative speed, and direction of movement using electromagnetic waves in the millimeter-wave frequency range.

Lidar complements both radar and camera technologies by using laser pulses to precisely measure distances and generate detailed 3D representations of the environment. Its high spatial resolution supports accurate object detection and localization, while the large volumes of sensor data require reliable, low-latency, high-speed data transmission.



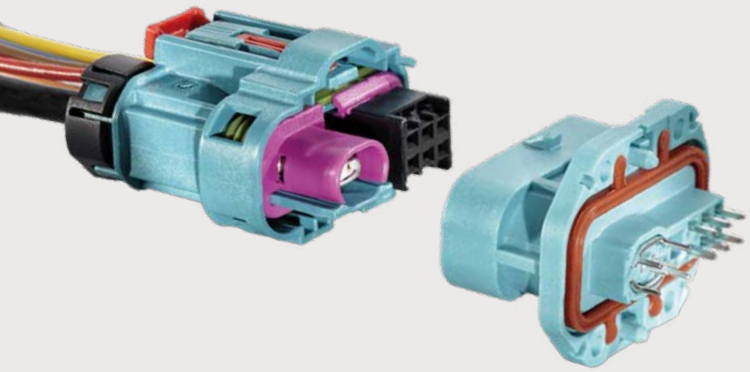

Press-Fit and Power over Connector (PoC)

Press-Fit and PoC solutions for both coaxial interfaces such as HFM®, FAKRA and RMC® and differential interfaces such as RosenbergerHSD® and H-MTD®. By combining high-speed data transmission and power supply within a single connection, PoC reduces the number of cables and connectors, saving installation space, weight, system complexity, and costs while enabling compact and efficient vehicle architectures.


Learn more about
Radar and LiDAR Solutions
www.rosenberger.com/radar

Camera Solutions

Rosenberger has developed compact camera connectors designed for high data rates in interior and exterior camera applications. These all-in-one, future-proof coaxial interfaces FAKRA, HFM®, RMC®, pigtail variants, and housings in metal or plastic can be tailored with PCB bullets, with or without tolerance compensation, depending on technical requirements. Our products are engineered for performance, reliability, and harsh environments.

- All-in-one: connector, housing, PCB bullet
- Tailored housings, available sealed or unsealed
- Scalable power supply due to MQS contacts
- Different housing materials available
- Maximum robustness and EMC shielding
- Adaptable and scalable modular systems
- Efficiency through a high level of automation



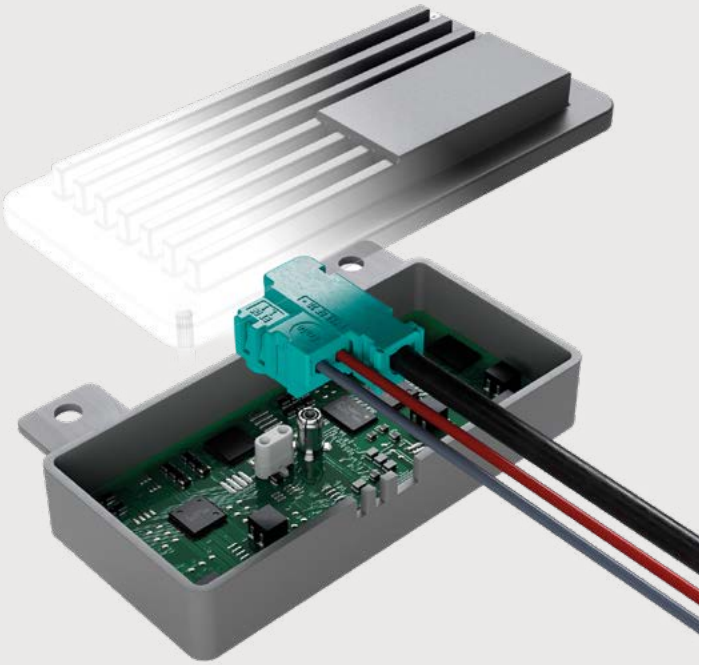


“DirectLink” Pigtails Wire-to-Board Solutions

“DirectLink” pigtail connectors in a compact size – 10 mm smaller than common standard versions – enable flexible installation in highly constrained environments. The fully assembled pigtail solution ensures reliable data transmission and scalable power supply.

Learn more about
Camera Solutions
www.rosenberger.com/aut-camera


HFM® – High-Speed FAKRA-Mini

Rosenberger HFM® is the best performing system of coaxial “Mini-Coax” connectors for the automotive industry. For frequencies up to 20 GHz, the intelligent modular system ensures fast transmission of high data rates up to 28 Gbps. Its innovative design addresses the growing requirement for cost savings as well as reduced weight and size.

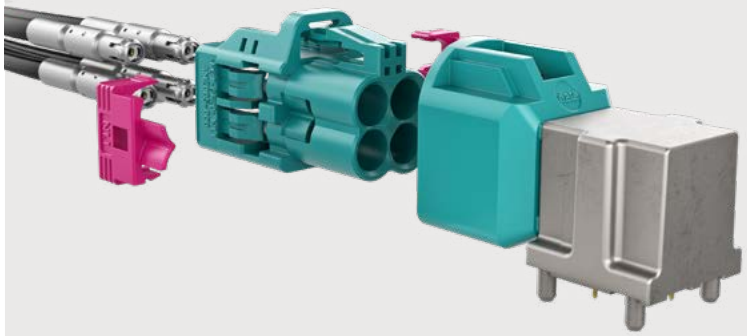

Learn more about HFM®

www.rosenberger.com/hfm

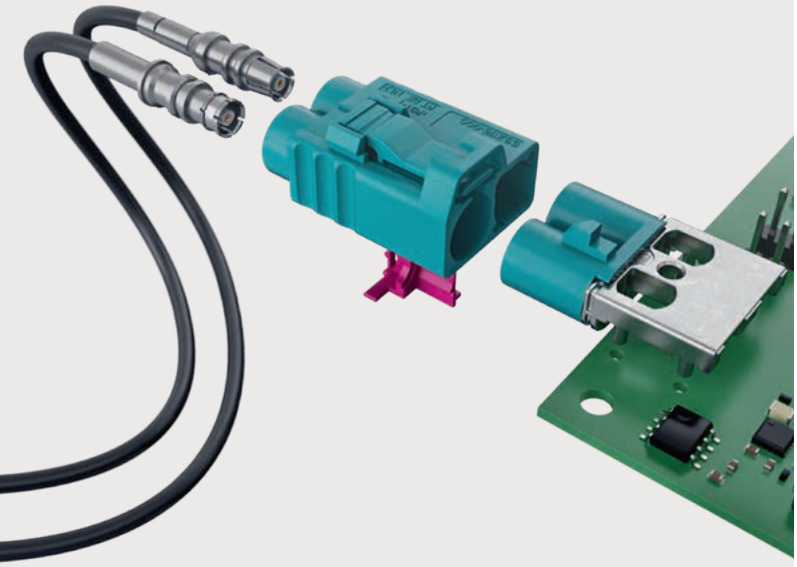

FAKRA

Rosenberger FAKRA are industry standard compatible connectors designed to fulfill the rigorous mechanical and environmental requirements of the automotive industry. Ensuring maximum electrical and mechanical performance, these high quality FAKRA connectors feature specific color coded plastic housings.

Learn more about FAKRA


www.rosenberger.com/fakra


H-MTD® – High-Speed Modular Twisted-Pair Data

Rosenberger H-MTD®, H-MTD®+ and H-MTD®e are differential connector systems up to 20 GHz for high-speed data transmission at data rates of up to 56 Gbps, contained in a compact yet robust automotive grade housing. A further major advantage of these connector systems is their modularity, providing the flexibility to support a wide range of Ethernet applications and industry protocols.

Learn more about H-MTD®

www.rosenberger.com/h-mtd

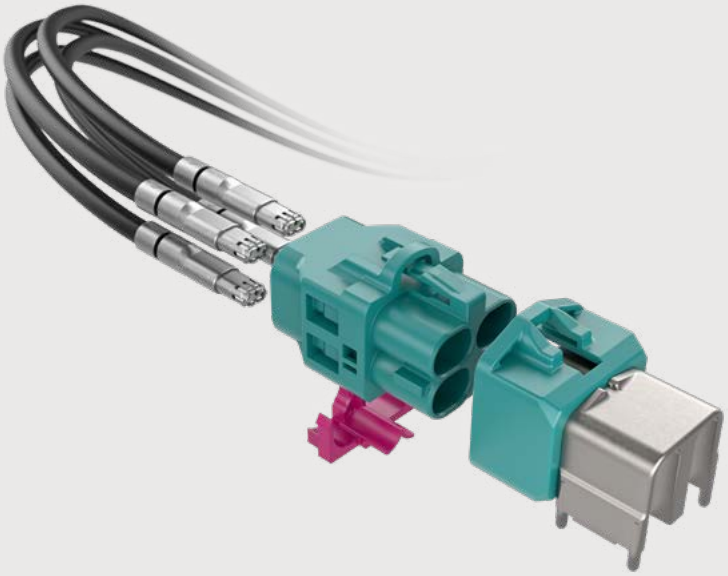

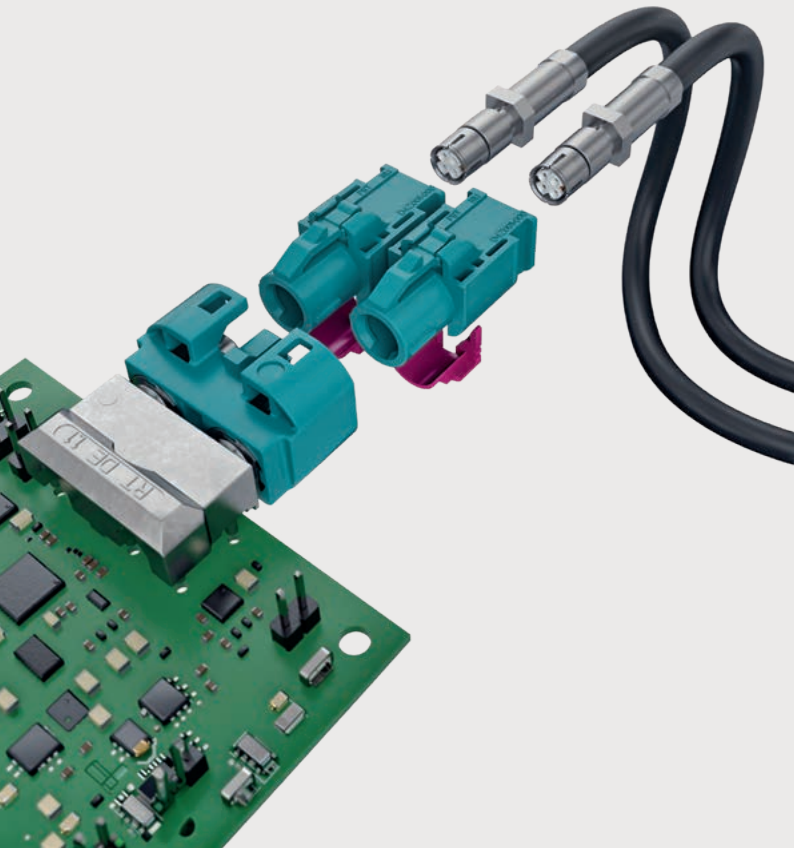


RosenbergerHSD®

RosenbergerHSD®, RosenbergerHSD®+2, +4, +8 and RosenbergerHSD®t are homogeneous impedance-controlled high-speed data connector systems up to 6 GHz, which directly address the high-speed data and low-voltage requirements of real-time automotive industry applications. Extremely compact and durable, these systems utilize shielded twisted quad cables and feature mechanical keying and latching for high connection retention.

Learn more about RosenbergerHSD®

www.rosenberger.com/hsd

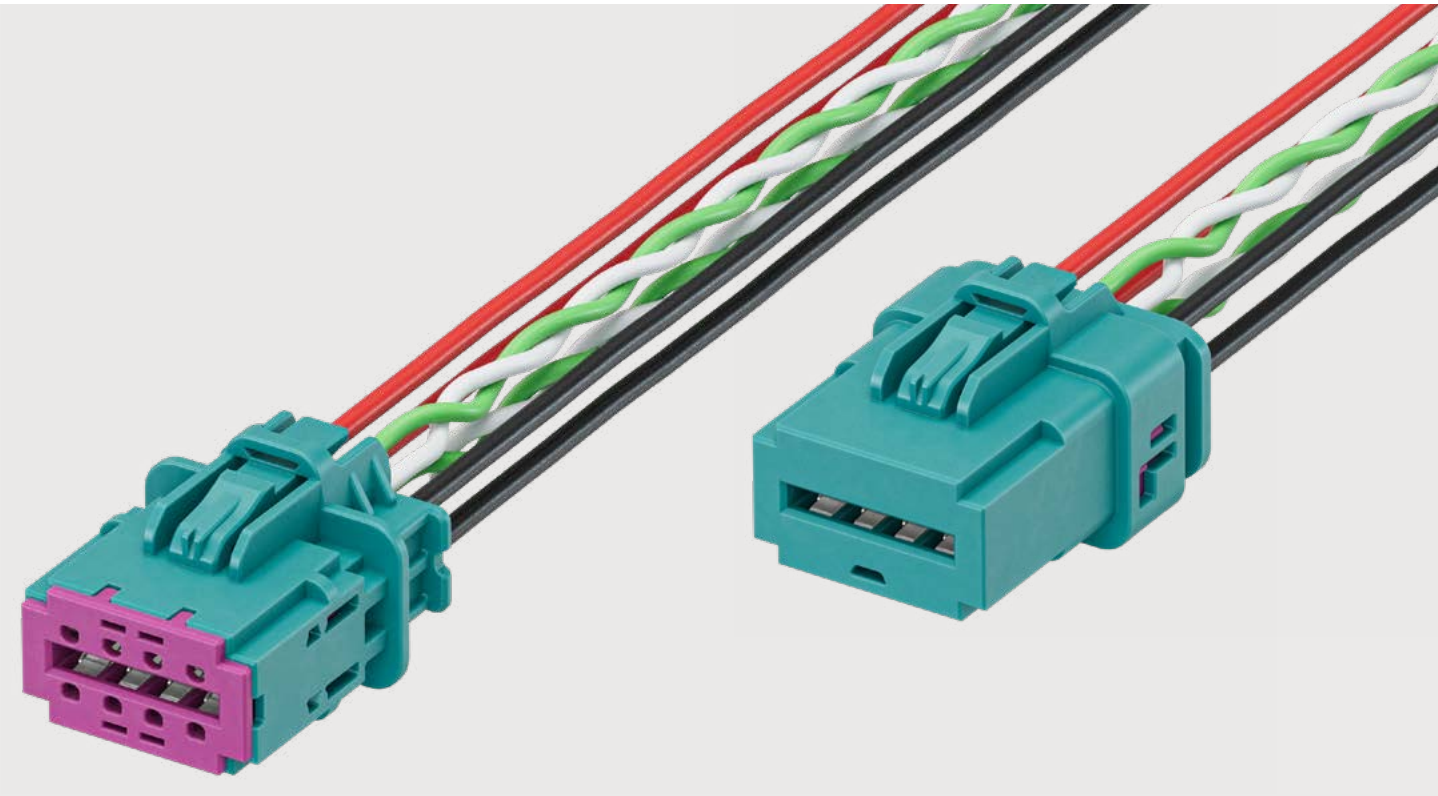

EDC® – Expanded Daisy Chain

Daisy chain systems are commonly used in electronics, industrial, and automation technology. They allow multiple devices or modules to be easily linked together in series. The assembled connectors ensure continuous signal transmission to the following units, even when individual connectors are unmated. At the same time, additional units can be mounted independently, while individual units can be replaced or removed without affecting the rest of the system.

EDC® connector architecture guarantees signal integrity in all connector states including unmated conditions. Ready-made cable sections in different standard cable lengths can be assembled together to create any custom combination, as required.

- Connection of the individual EDC® units (e.g. PCB) with or without impact on the rest of the system
- Compact, modular and economical
- Reduced installation space and cost savings
- Supports differential signals and power transmission
- Storable standardized subassemblies
- Fully automated cable assembly process

Learn more about EDC®

www.rosenberger.com/daisychain

Scalable Multiheader

Rosenberger scalable multiheaders enable various combinations with MQS contacts and data connectors for data transmission and power supply.

- Scalable multiheaders reduce weight and size by up to 40%
- Wide operating temperature range and reliable signal integrity
- Frequency range of up to 20 GHz
- Design and production according to customer specifications
- Fully automated assembly enabled by the modular concept
- Open to all protocols

Learn more about
Scalable Multiheader

www.rosenberger.com/multiheader



RoProxCon® SoM (System-on-Module)


The System-on-Module (SoM) from Rosenberger is a preconfigured transmission module. This stand-alone product is used for direct PCB mounting on the customer's electronics. Rosenberger supports integration into the respective customer application. Ethernet-based transmissions can be easily implemented using suitable adaptor circuits. In addition, proprietary I/O signals or fieldbuses can be utilized. A Design-in Service for the System-on-Module can be offered as well, if required.

They meet customer requirements in terms of quality, reliability, performance and price. The HV product line includes extremely compact connection solutions up to 1200 V with continuous currents of up to 450 A, that can be operated over the entire product lifetime.

- Full duplex transmission during 360° rotation
- Data transmission up to 3.125 Gbps
- Radio transmission at a carrier frequency of 60 GHz
- Individual localization and integration
- High tolerance against radial and axial misalignment
- Small form factor of 14.2×12.5 mm
- Low latency down to 7 ns
- Transmission through a wide variety of materials

Learn more about RoProxCon® SoM

www.rosenberger.com/roproxcon

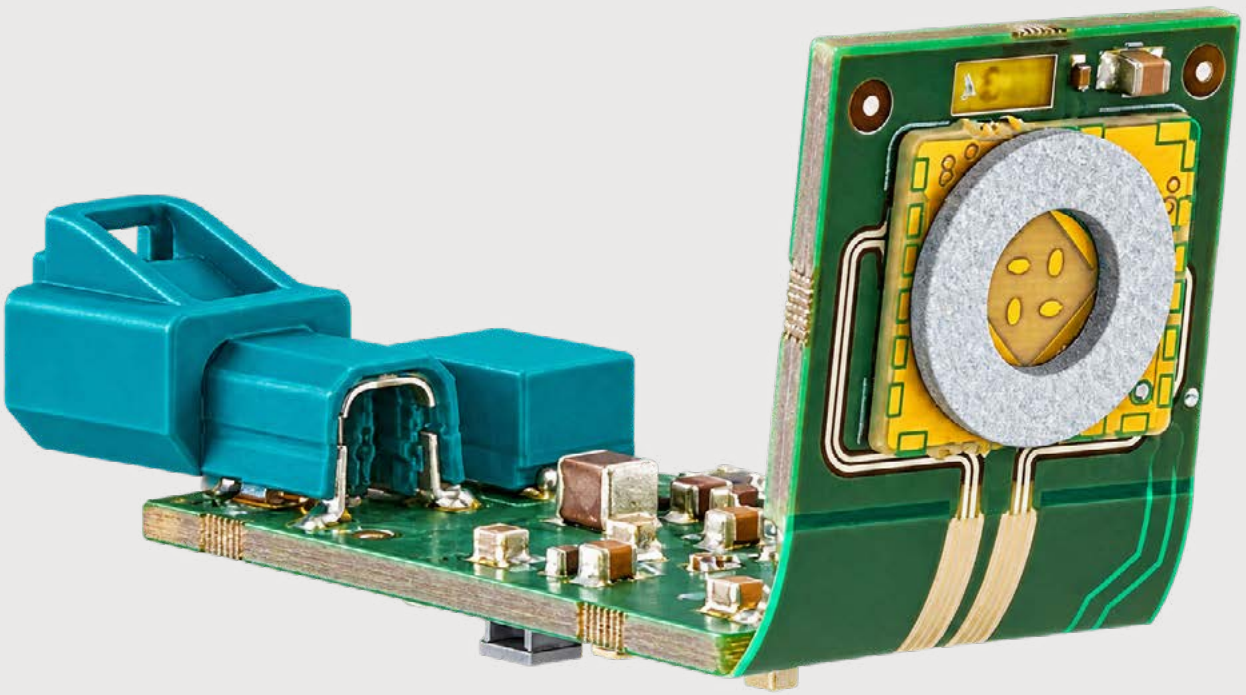



Magnetic Connectors

Rosenberger's magnetic self-mating connector series is an intelligent alternative to conventional mechanical mating. It provides all common functions and is suitable for power and data transmission.

Self-Mating

Self-mating works as follows: When the plug is approaching the socket, it is attracted by the magnetic force and virtually slides into the socket by itself. This makes handling efficient and comfortable and ensures a correct connection.

Fast, Reliable, Simple

The magnetic self-mating connectors automatically detect connections and prevent them from being torn out. They're ideal for connections that need to be connected and disconnected frequently.

Break-Away Function

The break-away function is designed to break the connection should the plug or cable be subjected to an acute tensile force (intentional or unintentional). This avoids the risk of injury to the user and damage to the connectors. The deliberate removal of the plug is also fast and simple due to the break-away function.

Charging Interface

Charging interfaces that ensure robots are readily available for onward flight by enabling fast, simple and safe battery recharging are essential. Our speedy connection solution is designed with this in mind.

MagCode®

Rosenberger MagCode® systems provide short-circuit-proof, self-finding magnetic connections for 12 V and 24 V applications. They are used, for example, for trickle charging of batteries in vehicles with longer standing times, such as cars, vans, motor homes, motorcycles and boats – especially in emergency vehicles. They are also used to supply power to mobile devices, such as external coolers or headlights.

- High-tech design
- Minimal mounting depth (port)
- Up to 10 A MagCode® PowerSystem
- Up to 25 A MagCode® PowerSystemPro
- Voltage 12 V and 24 V
- Mismating of 12 V and 24 V is not possible due to the different magnetic codings
- PowerSystemPro only, with additional twist-lock and up to 25 A current load

Learn more about MagCode®

www.rosenberger.com/magcode





RoPD®

RoPD® – Rosenberger Power Data Connectors with magnetic self-mating mechanism are designed for Light Electric Vehicles (LEV) including e-bikes and e-scooters as well as UGVs and drones. Providing a fast and reliable magnetic connection, these connectors are particularly suited for data communication and power transmission of voltages up to 60 V and current loads up to 40 A. The magnetic locking and precise self-mating capability prevents any accidental or forced disconnection and therefore possible damage to the connector or the LEV. Furthermore, the high tolerance pin and socket design allows many mating cycles.

- Current capacity (6 mm^2) 40 A at 65 °C
- Current (power pins) 3 A, 10 A, 18 A, 25 A, 40 A
- Working voltage (power pins) 60 V DC
- Voltage (data pins) 12 V
- Temperature range -40 °C to +65 °C
- Waterproof (mated) IP 64/67
- UV resistant
- Mating cycles ≥ 2500
- RoHS compliant

Learn more about RoPD®

www.rosenberger.com/ropd



High-Voltage Connectors

Rosenberger's extensive portfolio of shielded and unshielded high-voltage connectors has been developed especially for optimized power transmission in electric vehicles.

For Rosenberger, the product development goal is clear: minimum contact resistance plus high power density coupled with excellent EMC performance.

They meet customer requirements in terms of quality, reliability, performance and price. The HV product line includes extremely compact connection solutions up to 1200 V with continuous currents of up to 450 A that can be operated over the entire product lifetime.

Learn more about HV

www.rosenberger.com/hv


HVR®25

Rosenberger HVR®25 is the smallest shielded connector in its class, offering a current capacity of up to 40 A at a cable cross section of 4 mm^2, a compact design, and an optimized cost-performance ratio. With automotive platforms increasingly evolving to 1000 V and above, precise and efficient connector solutions are more important than ever. The HVR®25 was developed to meet these requirements by focusing on essential factors such as safety, reliability, and assembly efficiency – without unnecessary complexity.

Learn more about HVR®25

www.rosenberger.com/hvr25



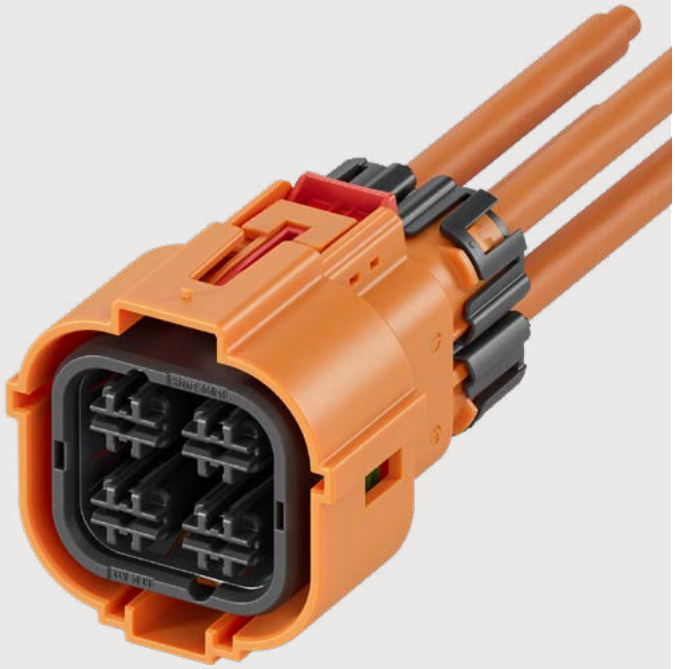

HVR®55

Designed with efficiency in mind, the HVR®55 connector reduces components to a minimum while delivering safe and reliable high-voltage performance. Its compact and flexible design helps to reduce material usage, weight, installation space, and overall system costs.

- Cable connectors and headers, 2-pole, 4-pole
- Single core cables 4 mm^2, 6 mm^2
- Current capacity 60 A at 85 °C
- Working voltage up to 100 V DC
- Vibration class V2

Learn more about HVR®55

www.rosenberger.com/hvr55

HVR®60

Rosenberger HVR®60 is a shielded connector system in small dimensions for cable cross sections of 4×6 mm² (multi core) and 2×16 mm² (single core). It offers a maximum current capacity of 60 A and a working voltage of 1000 V DC at a cable cross section of 6 mm². HVR®60 cable connectors are available in straight connector variants as well as right-angled headers.

HVR®60 connectors are mainly used for charging sockets to OBC (AC).

Learn more about HVR®60

www.rosenberger.com/hvr60





HPK

The Rosenberger HPK system can achieve up to 310 A (70 mm²) at 85 °C up to 1000 V. With their excellent vibration and current capacity performance the HPK connectors are well-suited for typical high-voltage electric vehicle applications such as the connection between the battery, inverter and PDU as well as the e-machine.

Learn more about HPK


www.rosenberger.com/hpk

HVR®210

As the automotive industry transitions from 400 V to 800 V architectures, even higher voltage levels of up to 1000 V and 1200 V are already emerging. Because higher voltages enable the same power to be transmitted at lower currents, conductor cross-sections can be reduced, allowing aluminum conductors to become a cost-effective alternative. The HVR®210 is designed for 1200 V, providing maximum future readiness and making it the ideal solution for next-generation high-voltage platforms in electric vehicles.

Learn more about HVR®210

www.rosenberger.com/hvr210

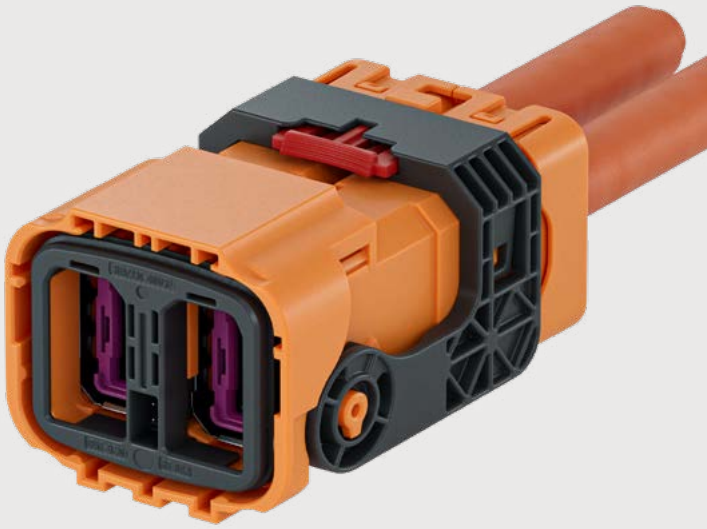



HVR®280

The HVR®280 sets a new benchmark for high-voltage, high-current connectors up to 310 A/1200 V, meeting global OEM specifications with outstanding electrical performance and an integration-optimized design. Its automated assembly concept simplifies manufacturing, and reducing components to the minimum makes it one of the market's most flexible, easily integrable solutions. It delivers a safe, reliable connection even in harsh conditions, with compact dimensions that cut cost, weight, and installation space for efficient vehicle packaging.

Learn more about HVR®280

www.rosenberger.com/hvr280



HVS®240, HVS®420

Rosenberger HVS connectors are safety-critical components in electric mobility. Designed for long-term reliability, they deliver high-voltage, high-current power transmission while withstanding harsh environmental conditions and ensuring that hazardous voltages remain safely isolated, even under fault conditions.

HVS®240 and HVS®420 connector systems for collective shield applications are used to connect electric motors up to continuous currents of 235/285 A or 410/317 A. With their aluminum housings, they are capable of operating safely at extreme temperature ranges from -40 °C to +140 °C. They are certified to vibration level 4 according to LV 215.

Customer-specific variants are available on request.

Learn more about
HVS®240, HVS®420

www.rosenberger.com/hvs

HVU®50

Unshielded Rosenberger HVU®50 connector series in small dimensions enables a maximum current capacity of 60 A at a cable cross section of 6 mm² and a working voltage of 1000 V DC. HVU®50 cable connectors for cable cross sections of 3 mm², 5 mm², 6 mm² are available in straight and inline variants as well as headers. HVU®50 connectors are mainly used for charging sockets to OBC (AC).



Learn more about HVU®50

www.rosenberger.com/hvu50



HVU®400

Unshielded Rosenberger HVU®400 connector series enables a maximum current capacity of 340 A at a cable cross section of 95 mm² and a working voltage of 1000 V DC. HVU®400 cable connectors for cable cross sections of 70 mm² and 95 mm² are available in right-angled variants. HVU®400 connectors are mainly used for charging sockets to battery (DC). The unique locking mechanism with a special lever and CPA (Connector Position Assurance) allows locking only when mated and prevents accidental unmating.

Learn more about HVU®400

www.rosenberger.com/hvu400



About Rosenberger

Rosenberger is a globally renowned manufacturer of electronic components and systems, recognized for cutting-edge technologies, engineering excellence, and uncompromising quality. Offering a broad range of standardized and customized connectivity solutions in RF, high-voltage, and fiber optic technologies.

Rosenberger ensures the reliable transmission of signals, data, and power in the most demanding application areas. Leading high-tech companies across sectors such as mobile communications and telecommunications, industrial measurement technology, automotive electronics, medical and industrial electronics, data centers, and aerospace rely on Rosenberger products for their precision and outstanding reliability. The CNC machining division manufactures precision parts for a variety of industries, including the automotive and commercial vehicle sectors, shipbuilding, and conventional mechanical and plant engineering.

The company's employees are known for their dedication, innovative spirit, and commitment to quality, all firmly rooted in the values of a traditional family business. Rosenberger takes care of the development, manufacturing and sales of the entire product portfolio.



Rosenberger Global Sales Network

Since its founding in 1958, Rosenberger has been family-owned and headquartered in Germany. From the company headquarters in Fridolfing, Upper Bavaria, the global Rosenberger Group manages numerous production and assembly locations as well as sales branches in Europe, Asia, North and South America.

Europe

- Germany
- France
- Italy
- Spain
- Sweden
- United Kingdom

Americas

- USA
- Brazil
- Chile

Asia

- China, Australia
- Japan
- Korea
- India
- Taiwan

Contact Headquarters

Rosenberger
Rosenberger Hochfrequenztechnik GmbH & Co. KG
Hauptstraße 1 | 83413 Fridolfing
P.O. Box 1260 | 84526 Tittmoning
Germany

Phone +49 8684 18-0
info@rosenberger.com
www.rosenberger.com

Status October 2026 – Technical modifications and errors excepted. Similar images.

Website

For more information refer to our website:
www.rosenberger.com/all-terrain

Rosenberger
Rosenberger Hochfrequenztechnik GmbH & Co. KG
Hauptstraße 1 | 83413 Fridolfing
P.O. Box 1260 | 84526 Tittmoning
Germany
Phone +49 8684 18-0
info@rosenberger.com
www.rosenberger.com
Certified by IATF 16949 · DIN EN 9100 · ISO 9001 · ISO 14001 · ISO 45001 · ISO 50001

Order No.
10266006 · Info2All-TerrainEN
1000/2026

Rosenberger® is a registered trademark of Rosenberger Hochfrequenztechnik GmbH & Co. KG.
All rights reserved.

© Rosenberger 2026